

Shenton PHG1500Pe - Perkins / Stamford Diesel Generator | ABB CB & Fitted Load bank Connection Point

Year: 2024 | Acoustic enclosure

Ref: FWC003

| General Information


Engine Brand	Perkins
Engine Model	4012-46TWG3A
Alternator Brand	Stamford
Alternator Model	S6L1D-H41

| AUXILIARY SYSTEMS


Control Module	DeepSea DSE 8610DS
Cooling	Radiator cooled
Generator Serial	PM24334-19328
Fuel Use at 75%	212 litres/hour*
Starting Batteries	Fitted
Fuel Tank	TBC
Year of Build	2024

| GENERATOR SET - KEY PARAMETERS

GENSET MODEL	PHG1500Pe
POWER PRP	1,360 kVA PRP / 1,088 kW
POWER ESP	1,500 kVA ESP / 1,200 kW
FREQUENCY / SPEED	50 Hz / 1500 RPM
OUTPUT VOLTAGE	3 Ph - 400 V
POWER FACTOR	0.8 pf
ENCLOSURE TYPE	Acoustic canopy



Office: +44 (0)1829 863497 | WhatsApp: +44 7424 980523 | Email: adam@fwpower.co.uk

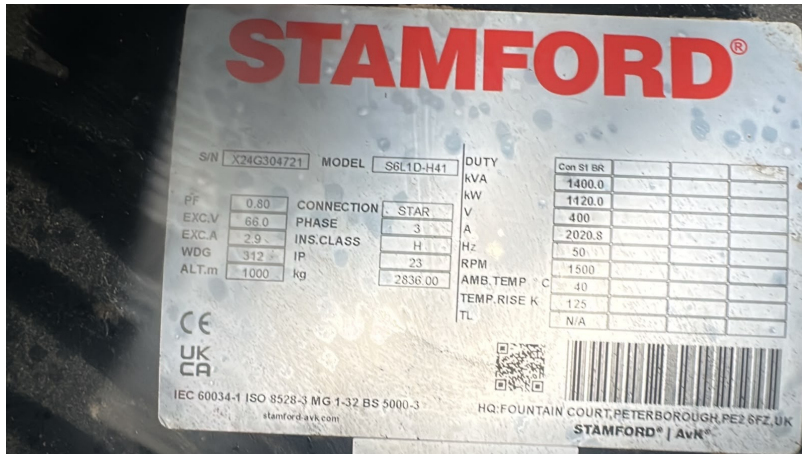

| DIMENSIONS & WEIGHT

Canopied / Silent Type

TBC LENGTH (mm)	TBC WIDTH (mm)	TBC HEIGHT (mm)	14,500 DRY WEIGHT (kg)
--------------------	-------------------	--------------------	---------------------------

Specifications follow the supplied generator and alternator plates/photos. Engine model, dimensions, hours and controller remain unconfirmed. *Fuel consumption is the stated nameplate value. Verify critical specifications and suitability before purchase. Transport equipment is not included.

Office: +44 (0)1829 863497 | WhatsApp: +44 7424 980523 | Email: adam@fwpower.co.uk